




aerospace  
climate control  
electromechanical  
**filtration**  
fluid & gas handling  
hydraulics  
pneumatics  
process control  
sealing & shielding



## Electronic Condensate Drains

ecodrain ED series for compressed air  
and industrial gases



# Electronic Condensate Drains

ecodrain ED3000 series

## Features and Advantages

**Electronic condensate drains of the ecodrain ED3000 series feature:**

- Non-wearing magnetic-core level control for optimised and lossfree discharge of condensate.
- Integrated dirt screen between level measurement and drain valve to protect the diaphragm valve with alarm monitoring.
- Diaphragm valve with large cross-section and condensate pilot control for extended service life.
- Potential-free alarm contact (except ED3002, ED3004).



## Non-wearing magnetic-core level control

The magnetic-core level control employs fixed switching points to operate the valve. The magnetic core signal transmitter position is detected by non-contact magnetic sensors:

- independently of the condensate type (water/oil).
- independently of the working pressure.

The collection tank integrated in the condensate drain is always used at optimum efficiency.


This results in a minimised number of switching cycles and thus, in a maximum service life of the drain valve. No calibration required!

## Integrated dirt screen

The dirt screen which is integrated between the level control and the drain valve:

- retains any contaminants that could damage the diaphragm valve.
- triggers an alarm, also if the screen is clogged by dirt.
- allows the drain to be cleaned easily and rapidly.

Therefore, it considerably increases the operating safety of the condensate drain. Since the condensate is pressed through the screen at working pressure, a cleaning will normally not be necessary between maintenance intervals.



Revolving condensate inlet with additional balance option:


- Condensate line can be connected from top or side.
- Simply rotate the condensate inlet and connect.

The connection for an additional vent line integrated in the top condensate inlet provides completely new connecting options so that condensate can no longer back up into the feed lines.

## Easy installation and servicing

- ED3002 can be removed together with the filter bowl remaining on.
- The drain can be removed quickly and easily from its place of installation.
- Servicing can be carried out in a convenient location.
- Cables to install new units can be ready-made.

Therefore, the ecodrain ED3000 series is a real contribution to preventive health care and avoids pain in the knees and back.

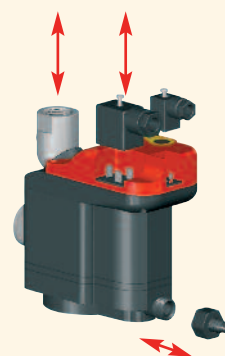



# Specifications

**Range of application:** Compressed air up to 16 bar – normal condensates

Model/Order no.	Compressor aftercooler	Capacity <sup>*1</sup>			Max.working pressure	Temperature range	Connections
		Refrigeration dryer	Filter <sup>*2</sup>				
ED3002-G230	---	---	720 m <sup>3</sup> /h		16 bar	1 – 60 °C	G 3/8
ED3004-G230	240 m <sup>3</sup> /h	480 m <sup>3</sup> /h	2.400 m <sup>3</sup> /h		16 bar	1 – 60 °C	1 x G 1/2, G 1/8
ED3007-G230	420 m <sup>3</sup> /h	840 m <sup>3</sup> /h	4,200 m <sup>3</sup> /h		16 bar	1 – 60 °C	2 x G 1/2, G 1/8
ED3030-G230	1,800 m <sup>3</sup> /h	3,600 m <sup>3</sup> /h	18,000 m <sup>3</sup> /h		16 bar	1 – 60 °C	2 x G 1/2, G 1/8
ED3100-G230	6,000 m <sup>3</sup> /h	12,000 m <sup>3</sup> /h	60,000 m <sup>3</sup> /h		16 bar	1 – 60 °C	2 x G 1/2, G 1/8

<sup>\*1</sup> referred to 1 bar(a) and 20°C at 7 bar working pressure, suction air compressor 25°C at 60% RH, air discharge temperature aftercooler 35°C, pressure dew-point refrigeration dryer 3°C.

<sup>\*2</sup> Condensate from aftercooler or refrigeration dryer already drained upstream – only for residual oil content or small quantities of condensate

Standard version with BSP thread (G) for 230V/50 - 60Hz supply voltage (230). Alternatively, versions with NPT thread (N) or 115V/50 - 60Hz (115) or 24V/50 - 60Hz (024) are available. 24V DC on request.


## Notes on power supply with instable voltage:

We recommend that you use 24VDC units with appropriate power supplies in operating environments with heavily fluctuating mains voltages or high frequency interference (short voltage peaks or voltage drops). This will ensure a reliable long-term operation even where unfavourable power conditions prevail.

## Accessories and servicing items:



Plugs (for cable preparation)

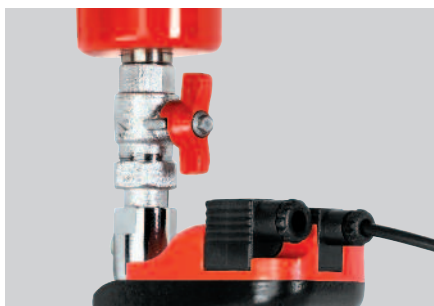


Installation kits



Service kits

## Dimensional drawings and weights:

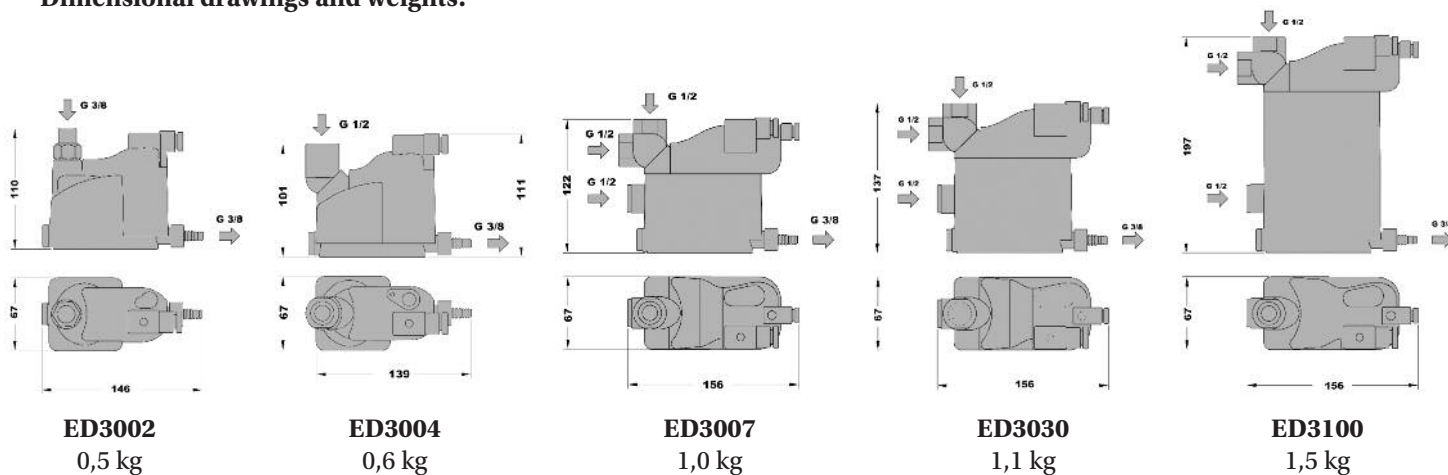

# Electronic Condensate Drains

ecodrain ED2000 series

## Features and Advantages

**Electronic condensate drains of the ecodrain ED2000 series feature:**

- Non-wearing magnetic-core level control for optimised and loss-free discharge of condensate.
- Robust and high-pressure resistant metal design. Made of compacted and sealed aluminium. Additional protection with an inside and outside powder coating.
- Diaphragm valve with large cross-section for extended service life
- Potential-free alarm contact.



## Robust metal design

All housing components that come into contact with the condensate are made of compacted and sealed metal (Maldaner process) and ensure:

- almost indestructible robustness of the product.
- extreme resistance to aggressive media (up to pH 3).

Therefore, the ecodrain ED2000 series is suitable not only for applications with up to 50 bar but also for use with certain industrial gases. A special CO<sub>2</sub> version is available for gaseous carbon dioxide at pressures of up to 25 bar.

## Heater

A frost proof option is available with:

- Thermostat-controlled heater.
- Insulating shells.

The ecodrain ED2000 series complies with protection class IP65 and is therefore suitable for outdoor installation and, in combination with the optional heater, even for installation in outdoor environments where there is a possibility of frost.

## Non-wearing magnetic-core level control

The magnetic-core level control employs fixed switching points to operate the valve. The magnetic core signal transmitter position is detected by non-contact magnetic sensors:

- independently of the condensate type (water/oil).
- independently of the working pressure.

The collection tank integrated in the condensate drain is always used at optimum efficiency.

This results in a minimised number of switching cycles and thus, in a maximum service life of the drain valve. No calibration required!



# Specifications

**Range of application:** Compressed air and (certain) industrial gases up to 50 bar - normal and problematic condensates

Model/Order no.	Capacity <sup>*1</sup>			Max.working pressure	Temperature range	Connections
	Compressor aftercooler	Refrigeration dryer	Filter <sup>*2</sup>			
ED2010-G230	1,290 m <sup>3</sup> /h	2,580 m <sup>3</sup> /h	12,900 m <sup>3</sup> /h	16 bar	1 – 60 °C	2 x G 1/2
ED2020-G230	6,000 m <sup>3</sup> /h	12,000 m <sup>3</sup> /h	60,000 m <sup>3</sup> /h	16 bar	1 – 60 °C	3 x G 3/4
ED2060-G230	66,000 m <sup>3</sup> /h	132,000 m <sup>3</sup> /h	660,000 m <sup>3</sup> /h	16 bar	1 – 60 °C	3 x G 3/4
ED2010/25-G230	1,290 m <sup>3</sup> /h	2,580 m <sup>3</sup> /h	12,900 m <sup>3</sup> /h	25 bar	1 – 60 °C	2 x G 1/2
ED2020/25-G230	6,000 m <sup>3</sup> /h	12,000 m <sup>3</sup> /h	60,000 m <sup>3</sup> /h	25 bar	1 – 60 °C	3 x G 3/4
ED2060/25-G230	66,000 m <sup>3</sup> /h	132,000 m <sup>3</sup> /h	660,000 m <sup>3</sup> /h	25 bar	1 – 60 °C	3 x G 3/4
ED2010/40-G230	1,290 m <sup>3</sup> /h	2,580 m <sup>3</sup> /h	12,900 m <sup>3</sup> /h	40 bar	1 – 60 °C	2 x G 1/2
ED2020/40-G230	6,000 m <sup>3</sup> /h	12,000 m <sup>3</sup> /h	60,000 m <sup>3</sup> /h	40 bar	1 – 60 °C	3 x G 3/4
ED2060/40-G230	66,000 m <sup>3</sup> /h	132,000 m <sup>3</sup> /h	660,000 m <sup>3</sup> /h	40 bar	1 – 60 °C	3 x G 3/4
ED2010/50-G230	1,290 m <sup>3</sup> /h	2,580 m <sup>3</sup> /h	12,900 m <sup>3</sup> /h	50 bar	1 – 60 °C	2 x G 1/2
ED2010/25-G230/CO <sub>2</sub>	1,290 m <sup>3</sup> /h	2,580 m <sup>3</sup> /h	12,900 m <sup>3</sup> /h	25 bar	1 – 60 °C	2 x G 1/2
ED2020/25-G230/CO <sub>2</sub>	6,000 m <sup>3</sup> /h	12,000 m <sup>3</sup> /h	60,000 m <sup>3</sup> /h	25 bar	1 – 60 °C	3 x G 3/4
ED2060/25-G230/CO <sub>2</sub>	66,000 m <sup>3</sup> /h	132,000 m <sup>3</sup> /h	660,000 m <sup>3</sup> /h	25 bar	1 – 60 °C	3 x G 3/4

<sup>\*1</sup> referred to 1 bar(a) and 20°C at 7 bar working pressure, suction air compressor 25°C at 60% RH, air discharge temperature aftercooler 35°C, pressure dew-point refrigeration dryer 3°C

<sup>\*2</sup> Condensate from aftercooler or refrigeration dryer already drained upstream – only for residual oil content or small quantities of condensate

Standard version with BSP thread (G) for 230V/50 - 60Hz supply voltage (230).

Alternatively, versions with NPT thread (N) or 115V/50 - 60Hz (115) or 24V/50 - 60Hz (024) are available.

24V DC on request

## Accessories and servicing items:



**Heater**




**Installation kits**




**Service kits**

## Dimensional drawings and weights:




**ED2010**

2 kg



**ED2020**

2,9 kg



**ED2060**

9,4 kg

# Why Electronic Condensate Drains?

## Electronic condensate drains with level control ensure lossfree condensate discharge

The condensate accumulates in the collection tank (1) integrated in the electronic condensate drain. An electronic level controller (2) continuously monitors the level. When the maximum level is reached, the electric drain valve (3), which is also integrated in the condensate drain, will open and thus drain the condensate from the compressed air system. When a minimum level is reached, the valve closes in time before compressed air can escape. This prevents the loss of compressed air.


## Electronic condensate drains with diaphragm valves discharge condensate reliably.

Condensate drainage via a diaphragm valve with large cross-section (4) ensures that contaminants are flushed out and thus ensures a long service

life and fault-free operation of the valve. At the same time, condensate is prevented from forming an emulsion that would need expensive condensate treatment.

## Electronic condensate drains with alarm contact monitor condensate drainage

If a fault has occurred, i.e. if the condensate cannot be discharged, the electronic control board (5) of the condensate drain generates an alarm signal. This allows timely detection and avoidance of damage caused by condensate to the downstream compressed air system or to the production, which may sometimes lead to immense costs.

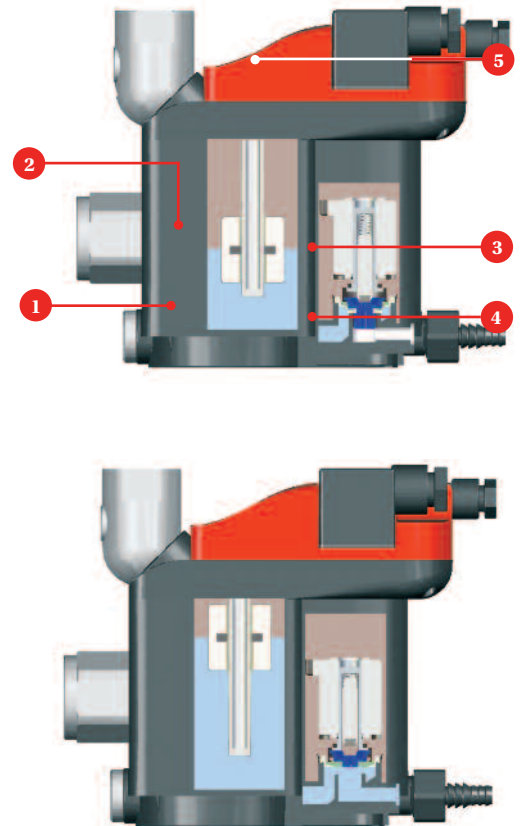


## Time-controlled condensate drains waste energy and money

If the control of a condensate drain is not level controlled but exclusively time-based, it employs preset values for valve operating times and intervals. However, since the amount of condensate in a compressed air system changes constantly (e.g. summer/winter, maximum/part load), the following problems arise with time-controlled condensate drains:

- Valve operating time is set too short, or operating intervals are too long: Not enough condensate is drained. COMPRESSED AIR SYSTEM BACKS UP.
- Valve operating time is set too long, or operating intervals are too short: The valve remains open although all the condensate has been drained. COMPRESSED AIR ESCAPES.
- High switching frequency because the condensate collection tank is too small: Premature failure without possibility of servicing. COMPRESSED AIR SYSTEM BACKS UP.
- Small valve nozzles are very susceptible to contaminations: Valve can no longer close – COMPRESSED AIR ESCAPES CONTINUOUSLY.

### Basis of the calculation:

- Valve aperture cross-section:  $\varnothing$  3 mm
- Resulting flow rate at 8 bar: 600 litres/min
- Equivalent compressor power: 4.4 kW
- Energy costs: 0.07 €/kWh

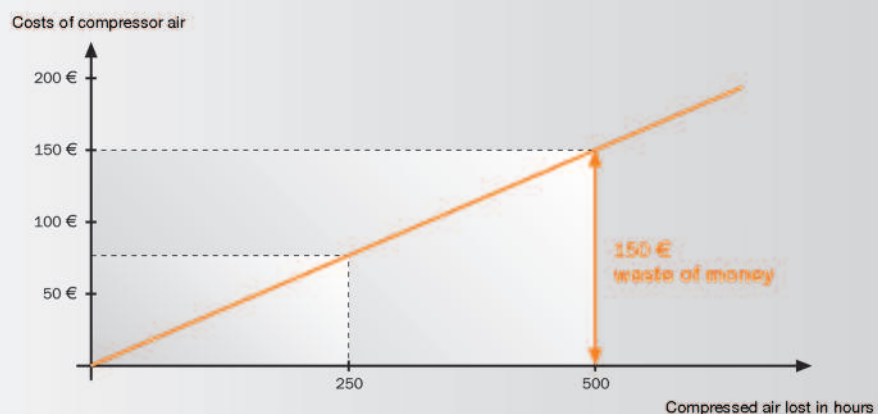

# Dimensioning Electronic Condensate Drains

When dimensioning condensate drains, it must be taken into account that different quantities of condensate need to be drained from the aftercoolers (the condensate is drained from the aftercooler itself, a cyclone separator located downstream, or the pressure vessel), the refrigeration dryers (condensate is usually drained within the dryer itself) and from the filters (residual oil contents or small quantities of condensate).

## 1. Standard dimensioning

Standard dimensioning is based on the following reference conditions:

Ambient (suction) air compressor: 25°C and 60% relative humidity

Working pressure: 7 bar

Air discharge temperature aftercooler: 35°C

Pressure dew-point refrigeration dryer: 3°C

The volume capacities stated in the technical specifications for the aftercooler, refrigeration dryer and the filter were calculated with these conditions.

### Example:

Compressor(s) with 2,000 m<sup>3</sup>/h (1 bar(a), 20°C), operated under the above reference conditions

Drain aftercooler: ED3100 (1,800 - 6,000 m<sup>3</sup>/h) or ED2020 (1,290 - 6,000 m<sup>3</sup>/h)

Drain refrigeration dryer: ED3030 (840 - 3,600 m<sup>3</sup>/h) or ED2010 (up to 2,580 m<sup>3</sup>/h)

Drain filter: ED3004 (720 - 2,400 m<sup>3</sup>/h) or ED2010 (up to 12,900 m<sup>3</sup>/h)

## 2. Extended dimensioning

This extended method allows the dimensioning to be adapted to climatic conditions and operating pressures that vary from the reference conditions.

	Ambient/Suction conditions (average summer temperature/relative humidity)										
	Compressor/Aftercooler					Refrigeration dryer					
	Working pressure	15°C 40%	20°C 50%	25°C 60%	30°C 70%	35°C 80%	15°C 40%	20°C 50%	25°C 60%	30°C 70%	35°C 80%
4 bar		16.5	3.4	1.5	0.8	0.5	2.6	1.8	1.3	1.0	0.7
6 bar		4.8	2.1	1.1	0.6	0.4	3.6	2.5	1.8	1.4	1.0
8 bar		3.4	1.7	0.9	0.6	0.4	4.7	3.3	2.4	1.8	1.3
10 bar		2.9	1.5	0.9	0.5	0.3	5.7	4.0	2.9	2.2	1.6
12 bar		2.6	1.4	0.8	0.5	0.3	6.8	4.7	3.4	2.6	1.9
14 bar		2.5	1.3	0.8	0.5	0.3	7.8	5.5	4.0	2.9	2.2
16 bar		2.4	1.3	0.8	0.5	0.3	8.9	6.2	4.5	3.3	2.5
25 bar		2.1	1.2	0.7	0.5	0.3	13.5	9.5	6.9	5.1	3.9
50 bar		1.9	1.1	0.7	0.4	0.3	26.6	18.6	13.5	10.0	7.6

All correction factors refer to the capacity of the drains on the aftercooler; they have been calculated for an aftercooler discharge temperature of +10°C above ambient/suction temperature and 3°C pressure dew-point of the refrigeration dryer.

### Example:

Compressor(s) with 2,000 m<sup>3</sup>/h (1 bar(a), 20°C), operated at 10 bar working-pressure. The average day temperature in summer is 30°C with 70% relative humidity.

Correction factor aftercooler: 0.5 (see table)

Correction factor refrigeration dryer: 2.2 (see table)

Correction factor filter: always 10

Drain aftercooler: 2,000 m<sup>3</sup>/h ÷ 0.5 = 4,000 m<sup>3</sup>/h (referred to compressor/aftercooler capacity)

Drain refrigeration dryer: 2,000 m<sup>3</sup>/h ÷ 2.2 = 910 m<sup>3</sup>/h (referred to compressor/aftercooler capacity)

Drain filter: 2,000 m<sup>3</sup>/h ÷ 10 = 200 m<sup>3</sup>/h (referred to compressor/aftercooler capacity)

Drain aftercooler: ED3100 (1,800 - 6,000 m<sup>3</sup>/h) or ED2020 (1,290 - 6,000 m<sup>3</sup>/h)

Drain refrigeration dryer: ED3030 (420 - 1,800 m<sup>3</sup>/h) or ED2010 (up to 1,290 m<sup>3</sup>/h)

Drain filter: ED3004 (up to 240 m<sup>3</sup>/h) or ED2010 (up to 12,900 m<sup>3</sup>/h)



# Parker Worldwide

**AE – UAE, Dubai**  
Tel: +971 4 8127100  
parker.me@parker.com

**AR – Argentina, Buenos Aires**  
Tel: +54 3327 44 4129

**AT – Austria, Wiener Neustadt**  
Tel: +43 (0)2622 23501-0  
parker.austria@parker.com

**AT – Eastern Europe, Wiener Neustadt**  
Tel: +43 (0)2622 23501 900  
parker.easteurope@parker.com

**AU – Australia, Castle Hill**  
Tel: +61 (0)2-9634 7777

**AZ – Azerbaijan, Baku**  
Tel: +994 50 2233 458  
parker.azerbaijan@parker.com

**BE/LU – Belgium, Nivelles**  
Tel: +32 (0)67 280 900  
parker.belgium@parker.com

**BR – Brazil, Cachoeirinha RS**  
Tel: +55 51 3470 9144

**BY – Belarus, Minsk**  
Tel: +375 17 209 9399  
parker.belarus@parker.com

**CA – Canada, Milton, Ontario**  
Tel: +1 905 693 3000

**CH – Switzerland, Etoy**  
Tel: +41 (0)21 821 87 00  
parker.switzerland@parker.com

**CL – Chile, Santiago**  
Tel: +56 2 623 1216

**CN – China, Shanghai**  
Tel: +86 21 2899 5000

**CZ – Czech Republic, Klecany**  
Tel: +420 284 083 111  
parker.czechrepublic@parker.com

**DE – Germany, Kaarst**  
Tel: +49 (0)2131 4016 0  
parker.germany@parker.com

**DK – Denmark, Ballerup**  
Tel: +45 43 56 04 00  
parker.denmark@parker.com

**ES – Spain, Madrid**  
Tel: +34 902 330 001  
parker.spain@parker.com

**FI – Finland, Vantaa**  
Tel: +358 (0)20 753 2500  
parker.finland@parker.com

**FR – France, Contamine s/Arve**  
Tel: +33 (0)4 50 25 80 25  
parker.france@parker.com

**GR – Greece, Athens**  
Tel: +30 210 933 6450  
parker.greece@parker.com

**HK – Hong Kong**  
Tel: +852 2428 8008

**HU – Hungary, Budapest**  
Tel: +36 1 220 4155  
parker.hungary@parker.com

**IE – Ireland, Dublin**  
Tel: +353 (0)1 466 6370  
parker.ireland@parker.com

**IN – India, Mumbai**  
Tel: +91 22 6513 7081-85

**IT – Italy, Corsico (MI)**  
Tel: +39 02 45 19 21  
parker.italy@parker.com

**JP – Japan, Tokyo**  
Tel: +81 (0)3 6408 3901

**KR – South Korea, Seoul**  
Tel: +82 2 559 0400

**KZ – Kazakhstan, Almaty**  
Tel: +7 7272 505 800  
parker.easteurope@parker.com

**MX – Mexico, Apodaca**  
Tel: +52 81 8156 6000

**MY – Malaysia, Shah Alam**  
Tel: +60 3 7849 0800

**NL – The Netherlands, Oldenzaal**  
Tel: +31 (0)541 585 000  
parker.nl@parker.com

**NO – Norway, Asker**  
Tel: +47 66 75 34 00  
parker.norway@parker.com

**NZ – New Zealand, Mt Wellington**  
Tel: +64 9 574 1744

**PL – Poland, Warsaw**  
Tel: +48 (0)22 573 24 00  
parker.poland@parker.com

**PT – Portugal, Leca da Palmeira**  
Tel: +351 22 999 7360  
parker.portugal@parker.com

**RO – Romania, Bucharest**  
Tel: +40 21 252 1382  
parker.romania@parker.com

**RU – Russia, Moscow**  
Tel: +7 495 645-2156  
parker.russia@parker.com

**SE – Sweden, Spånga**  
Tel: +46 (0)8 59 79 50 00  
parker.sweden@parker.com

**SG – Singapore**  
Tel: +65 6887 6300

**SK – Slovakia, Banská Bystrica**  
Tel: +421 484 162 252  
parker.slovakia@parker.com

**SL – Slovenia, Novo Mesto**  
Tel: +386 7 337 6650  
parker.slovenia@parker.com

**TH – Thailand, Bangkok**  
Tel: +662 717 8140

**TR – Turkey, Istanbul**  
Tel: +90 216 4997081  
parker.turkey@parker.com

**TW – Taiwan, Taipei**  
Tel: +886 2 2298 8987

**UA – Ukraine, Kiev**  
Tel: +380 44 494 2731  
parker.ukraine@parker.com

**UK – United Kingdom, Warwick**  
Tel: +44 (0)1926 317 878  
parker.uk@parker.com

**US – USA, Cleveland**  
Tel: +1 216 896 3000

**VE – Venezuela, Caracas**  
Tel: +58 212 238 5422

**ZA – South Africa, Kempton Park**  
Tel: +27 (0)11 961 0700  
parker.southafrica@parker.com

Ed. 2010-06-29

**European Product Information Centre**  
Free phone: 00 800 27 27 5374  
(from AT, BE, CH, CZ, DE, EE, ES, FI, FR, IE, IL, IS, IT, LU, MT, NL, NO, PT, SE, SK, UK)